


# GTS312

双12寸三分频三驱动线阵列音箱

Dual 12" Three-way Tri-amp Line Array Speaker

# GTS SERIES

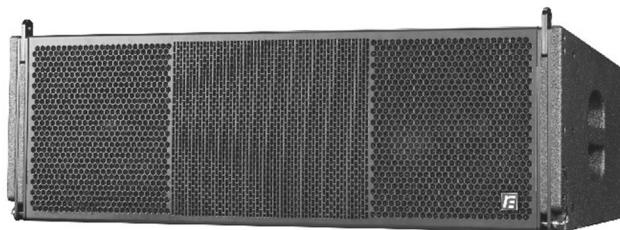


## 应用范围 Application

- ▶ 剧场、音乐厅、宴会厅、教堂、多功能类大厅主扩声、流动演出、体育馆主扩声、户外大型广场主扩声
- ▶ Theater, Concert hall, Church, FOH of multifunction hall, Touring system, FOH of Stadium, FOH for outdoor large square.

## 产品特性 Features

- ▶ GTS312是一款紧凑型高性能线阵列音箱; 精选优质高效能材料, 2个75mm钕磁高音压缩单元, 4个6.5寸44mm钕磁中音单元和两个12寸75mm钕磁低音单元; 以高频单元为波阵面中轴核心, 中频和低频驱动单元完全对称结构设计, 形成共面对称耦合波阵面, 实现简单、精准及对称的声学覆盖, 让每个听音点都得到品质一致的声音和同样平滑的频响曲线, 同时确保了声音的精密连贯性能和强劲的动态冲击力;
- ▶ 表面采用聚氨酯喷涂工艺, 更结实耐磨; 配置三点平衡式吊架件, 同时在音箱侧面和背面共配置了四个力学优化式抽手, 让搬运和快速搭建工作非常简单方便; 专为大型固定安装及大型流动扩声系统提供高清晰度解决方案。
- ▶ GTS312 is a compact high performance line array speaker, select high quality material, equipped with 2pcs 75mm Neodymium compression driver, 4pcs 6.5" 44mm Neodymium midrange unit and 2pcs 12" 75mm Neodymium woofer; Taking high frequency element as the core of the central axis of the wave front, middle and low frequency unit are perfectly symmetric structural design, formed coplanar symmetric coupled wave front, realize simple, accurate and symmetrical acoustic coverage, make sure each position enjoys good quality sound, at the same time, it ensures the precision coherence of sound and the strong dynamic impact.
- ▶ The coating is polyurea spraying process, more stronger and wearable, with three-point balanced riggings, there are four mechanical optimal handles on the side and back of the speaker, make it simple and convenient for transportation and rapid construction. Designed to provide high-definition solutions for large fixed installations and large touring sound reinforcement systems.

## 产品尺寸 Product dimension

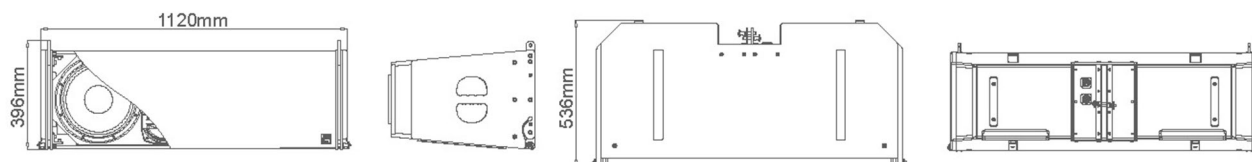

## 参数规格 Specifications

系统类型 双12寸三分频三驱动线阵列音箱	System	Dual 12" Three-way Tri-amp Line Array Speaker
频率响应 60Hz~18kHz(±2dB)/50Hz~20kHz(-10dB)	Frequency response	60Hz~18kHz(±2dB)/50Hz~20kHz(-10dB)
灵敏度(1W/1m) HF:112dB MF:103dB LF:102dB	Sensitivity( 1W/1m )	HF:112dB MF:103dB LF:102dB
标称阻抗 HF:16Ω MF:16Ω LF:16Ω	Nominal impedance	HF:16Ω MF:16Ω LF:16Ω
额定功率(AES) HF:150W MF:600W LF:900W	Rated power( AES )	HF:150W MF:600W LF:900W
分频点 HI-MID:1.3kHz LO-MID:300Hz	Crossover : HI-MID	HI-MID:1.3kHz LO-MID:300Hz
低音单元 2×12"(3"音圈)	LF unit	2×12"(3"voice coil)
中音单元 4×6.5"(1.7"音圈)	MF unit	4×6.5"(1.7"voice coil)
高音单元 2×3"(3"音圈)	HF unit	2×3"(3"voice coil)
覆盖角度(H×V) 100°×10°	Dispersion(H×V)	100°×10°
最大声压级(连续/峰值) HF:133dB/139dB, MF:130dB/136dB, LF:131dB/137dB	SPL(Continuous/Peak)	HF:133/139dB, MF:130/136dB, LF:131/137dB
连接件 2×威浦7芯防水插座	Connector	2×Weipu 7 pin waterproof socket
HF:1+ 2-, MID:3+ 4-, LF:5+ 6-,		HF:1+ 2-, MID:3+ 4-, LF:5+ 6-
尺寸(H×W×D) 396×1120×536mm	Dimension(H×W×D)	396×1120×536mm
重量 67kg	Weight	67kg



广州市锐丰智能科技有限公司 A: 广东省广州市番禺区市莲路石楼路段10号  
T: 020-3928 0043 F: 020-39280123-8014 E: info@rfintell.com Z: 511447 www.rfintell.com

Guangzhou Ruifeng Intelligence Technology Co., Ltd Address: No. 10, Shilou Section, Shilian Road, Panyu District, Guangzhou, Guangdong, China  
T: +86 2039280083 Mobile: +86 13609092324 F: +86-20-39280123-8014 E: mail:sales@rfintell.com Z: 511447 www.rfintell.com