


应用范围 Application

- ▶ 大会议厅、中小型多功能厅主扩声、中小型流动演出主扩声、大型扩声系统辅助扩声
- ▶ Main sound for Large conference hall, Small and medium sized multi-function hall, main sound of small and medium-sized touring performance, and supporting fills of large-scale sound-amplifying system

产品特性 Features

- ▶ GTS26设计秉承了GTS系列经典的紧凑型 and 系统化高精度线性阵列独特风格，采用1个1.4寸进口高音单元，配置理想的线性声学波阵面高音号角，实现精准及均匀的声学覆盖；低频率采用2个6.5寸中低音单元；全新三点式简易安装吊架件，每组可吊挂多达16只音箱，具备7:1的安全系数；并且配置了两个力学优化式抽手。
- ▶ GTS26 design follows GTS series, which is a compact and systematical high-precision linear array unique style, adopts a 1.4 inch imported high pitch unit, with ideal linear acoustic wavefront high pitch horns, to achieve precise and uniform acoustic coverage. Low frequency uses two 6.5-inch mid-bass units; new three-point simple installation hanger parts, each group can hang up to 16 speakers, with a safety factor of 7:1; equipped with two mechanical optimization draw hands.

产品尺寸 Product dimension

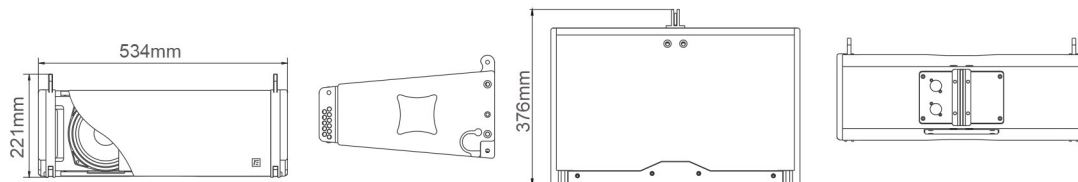

参数规格 Specifications

系统类型	双6.5寸二分频二驱动线阵列音箱	System type	Dual 6.5 inch Two-Way Bi-Amp line array speaker
灵敏度(1w/1m)	HF:107dB LF:95dB	Sensitivity(1W/1m)	HF:107dB LF:95dB
频率响应	75Hz~19kHz(±3dB)/70Hz~20kHz(-10dB)	Frequency response	75Hz~19kHz(±3dB)/70Hz~20kHz(-10dB)
额定功率(AES)	HF:50W LF:300W	Power rating(AES)	HF:50W LF:300W
最大声压级(连续/峰值)	HF:124dB/130dB ; LOW:119.5dB/125.5dB	SPL(continuous/peak)	HF:124dB/130dB ; LOW:119.5dB/125.5dB
覆盖角度(H×V)	110°×10°	Dispersion(H×V)	110°×10°
标称阻抗	HF:16Ω/LF:16Ω	Nominal Impedance	HF:16Ω/LF:16Ω
低音单元	2×6.5寸低音(38mm)	LF	2×6.5"(38mm)
高音单元	1×1.4寸高音(35mm)	HF	1×1.4(35mm)
连接件	2×NEUTRIK NL4MP四芯插座, HF:2+2-/LF:1+1-	connectors	2×NEUTRIK NL4MP, HF:2+2-/LF:1+1-
尺寸(H×W×D)	221×534×376mm	Dimension(H×W×D)	221×534×376mm
重量	16kg	Weight	16kg

