

NOVI-MS

4×6.5寸中低频音柱音箱

4×6.5" low and medium frequency column speaker

NOVI

SERIES

应用范围 Application


►会议室、多功能厅的主扩声、会议厅、剧场的辅助扩声、阶梯教室、教堂、音乐厅扩声、小型流动演出、露天音乐喷泉及灯光秀扩声

►Main sound for Conference room, Multi-function hall, supporting fills for theater, entertainment room, restaurant room, small touring live show, Outdoor music fountain and lighting sound transmission.


产品特性 Features

►NOVI-MS是NOVI系列新款迷你中低频音柱扬声器，4个6.5寸中低音单元组成，与NOVI mini全频音柱组合成三分频二驱动扩声系统，一方面增加了中低频动态能量，让声音中低频更加厚实有力；另一方面，增加NOVI mini全频音柱在堆叠模式时的覆盖高度；给不同类型的扩声组合方式提供了高度灵活性和理想的解决方案。

►NOVI-MS, the new member of NOVI series, is a mini column speaker that applies four 6.5" low and medium frequency speaker drivers. To combine with NOVI mini column, it could be a three-way bi-amp reinforcement system.

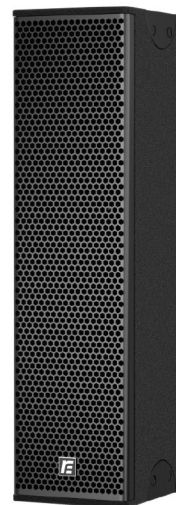

产品尺寸 Product dimension

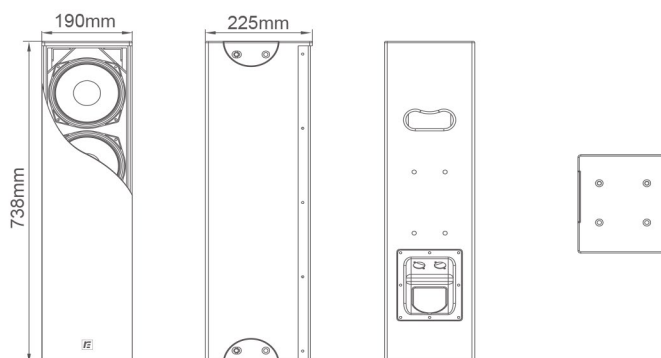

参数规格 Specifications

系统类型	4×6.5寸中低频音柱音箱	System type	4×6.5" low and medium frequency column speaker
灵敏度(1W/1m)	96dB	Sensitivity(1W/1m)	96dB
频率响应	75Hz~5000Hz (-10dB)	Frequency response	75Hz~5000Hz (-10dB)
标称阻抗	8Ω	Nominal impedance	8Ω
额定功率(AES)	550W	Power rating(AES)	550W
低音单元	4×6.5寸钕磁低音单元 (45mm)	LF	4×6.5" Neodymium LF driver
最大声压级 (连续/峰值)	123dB/129dB	SPL (continuous/peak)	123dB/129dB
连接件	2×NEUTRIK NL4MP四芯插座, 1+1-	Connectors	2×NEUTRIK NL4MP, 1+1-
吊挂硬件	M8吊点×20, 连接侧板×4	Fittings	M8×20, side plate ×4
尺寸(H×W×D)	738×190×225mm	Dispersion(H×W×D)	738×190×225mm
重量	14kg	Weight	14kg



广州市锐丰智能科技有限公司 A: 广东省广州市番禺区市莲路石楼路段10号
T: 020-3928 0043 F: 020-39280123-8014 E: info@rfintell.com Z: 511447 www.rfintell.com

Guangzhou Ruifeng Intelligence Technology Co., Ltd Address: No.10, Shilou Section, Shilian Road, Panyu District, Guangzhou, Guangdong, China
T: +86 2039280083 Mobile: +86 13609092324 F: +86-20-39280123-8014 E: mail:sales@rfintell.com Z: 511447 www.rfintell.com

