

beyma

## 应用范围 Application

- 剧场、礼堂、演艺大厅主扩声、大会议厅、多功能厅主扩声、体育场馆扩声、中小型流动演出主扩声、大型扩声系统辅助扩声
- Stadium, Theatre, Auditorium, Banquet hall, Multi-function hall, Touring, Portable application

## 产品特性 Features


► VK210是VK系列革新优化产品，设计秉承了VK系列紧凑高精度线性阵列扬声器理念，采用全新高品质2×10寸低音单元、1×3寸（75mm音圈）高音压缩单元，精选优质高效能配件与优越动态能量特点完美融合，让大功率工作时失真降到最小，保证听音覆盖区域内获得一致性最佳的声学效果。

► 搭配简易安装三点平衡吊挂连接件，每组音箱吊挂多达16只音箱，具备7：1的安全系数，箱体表面采用结实耐磨聚脲喷涂工艺，并且配置了四个力学优化式抽手。

► VK210 is the innovative product of VK series, which has the concept of impact and high precision line array system. Employed high-end 2×10" low driver unit and 1×3" high frequency unit with (75mm aluminium voice coil). Collocated with high-quality, high-efficiency accessories as well as dynamic energy characteristics. So as to minimize the distortion during high-power operation and ensure the acoustic effect in the coverage area.

Equipped with three-point balanced hanging connector, each group of speakers can hang up to 16 speakers. With a safety factor of 7:1, the surface of the speakers adopts a solid wear-resistant polyurea spraying process and four mechanical optimized pumping hands are arranged.

## 产品尺寸 Product dimension

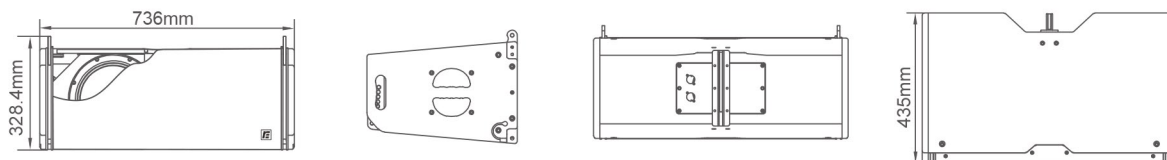

## 参数规格 Specifications

| 系统类型         | 双10寸二分频二驱动曲线阵列音箱                     | System type        | Dual 10" Two-Way Bi-Amp Line Array Speaker        |
|--------------|--------------------------------------|--------------------|---------------------------------------------------|
| 灵敏度(1W/1m)   | HF : 110dB/LF : 99dB                 | Sensitivity(1W/1m) | HF : 110dB/LF : 99dB                              |
| 频率响应         | 70Hz~19kHz(±3dB)/65Hz~20kHz(-10 dB)  | Frequency response | 70Hz~19kHz(±3dB)/65Hz~20kHz(-10 dB)               |
| 额定功率(AES)    | HF : 110W/ LF : 500W                 | Power rating(AES)  | HF : 110W/ LF : 500W                              |
| 最大声压级(连续/峰值) | HF:130dB/136dB,LOW:126dB/132dB       | SPL(continue/peak) | HF:130dB/136dB,LOW:126dB/132dB                    |
| 覆盖角度(H×V)    | 90°×10°                              | Dispersion(H×V)    | 90°×10°                                           |
| 标称阻抗         | HF : 16Ω/LF : 16Ω                    | Nominal Impedance  | HF : 16Ω/LF : 16Ω                                 |
| 低音单元         | 2×10寸低音(65mm音圈)                      | LF                 | 2×10" Low driver(65mm voice coil)                 |
| 高音单元         | 1×3寸高音(75mm音圈)                       | HF                 | 1×3" High driver (75mm voice coil)                |
| 连接方式         | 2×NEUTRIK NL4MP四芯插座, HF:2+2-/LF:1+1- | Connectors         | 2×NEUTRIK 2×NEUTRIK NL4MP socket, HF:2+2-/LF:1+1- |
| 尺寸(H×W×D)    | 328.4×736×435mm                      | Dimension(H×W×D)   | 328.4×736×435mm                                   |
| 重量           | 34kg                                 | Weight             | 34kg                                              |

