



产品特性 Features



►本控制面板用于配套我司数字音频处理器(DP-1212AEC/DP-1616AEC)产品, 控制面板使用5寸电阻触摸屏, 通过RS485接口发送控制命令。最大支持16路音频输入和输出通道的静音、音量调节及场景切换等功能。匹配146型底盒进行安装。


►外壳尺寸 (W×H):157.6mm×92mm 内嵌壳尺寸 (W×H):135mm×70mm 固定螺钉尺寸 (W):120mm

►This control panel is used to match our digital audio processor products(DP-1212AEC/DP-1616AEC) to realize fast control function.It uses 5-inch resistive touch screen, send control commands through RS485 interface, no software configuration, it can be operated by connecting power supply with processor.

Maximum support 16 input and output channels' mute, volume control and scene switching function.The control panel matches the standard 146 box for installation.

►Shell size (W×H):157.6mm×92mm Embedded shell size (W×H):135mm×70mm fixed screwed size (W):120mm

P5接线图 P5 connection diagram

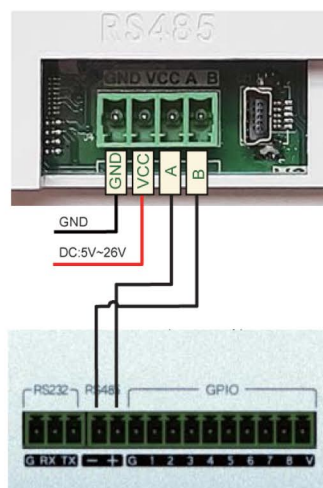

控制面板接口
control panel interface

处理器接口
processor interface

注意事项 Attention

►请注意接线顺序

►RS485 线路最大长度 1000 米左右, 因线材种类质量而异

►若设备不能成功连接, 请确认处理器软件及固件已更新至最新版

►被控处理器的通道数应大于或等于控制面板通道数

►Please note the order of cable connection

►RS485 maximum cable length of 1000 meters, it varies according to the cable quality

►If the device can not be connected successfully, please confirm that the processor software and firmware have been updated to the latest edition

►The number of the controlled processor channels should be larger than or equal to the number of the control panel channels

