


VK310+

双 10 寸三分频三驱动曲线阵列音箱

Dual 10" three-way tri-amp line array speaker

VK SERIES

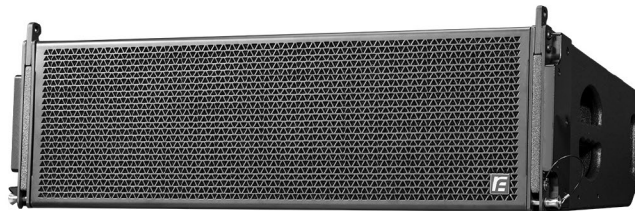


应用范围 Application

- 剧场、礼堂、演艺大厅主扩声、大会议厅、多功能厅主扩声、体育场馆扩声、中小型流动演出主扩声、大型扩声系统辅助扩声
- Stadium, Theatre, Auditorium, Banquet hall, Multi-function hall, Touring, Portable application

产品特性 Features

- VK310+ 是一款双10寸三分频三驱动紧凑型线阵列扬声器，精选优质高效能配件，所有单元选用轻便的钕磁钢驱动单元；低频部分由2个对称于箱体轴心的10寸低音单元负责，从而保证低频拥有坚实的音色和强劲冲击力；中、高频是同轴点声源结构设计，中频号角由一个8寸钕磁中音单元驱动，在中频单元前面同一个轴心安装了1个2.5寸钕磁高音压缩单元及平面波转换器，拥有90°的水平指向性和10°的垂直指向角度，让声音形成理想的线性声学波阵面，对覆盖区域进行准确的投射。
- VK310+ 表面采用聚脲喷涂工艺，更结实耐磨；配置三点平衡式吊架件，同时配置了四个力学优化式拉手，让搬运和快速搭建工作能非常简单方便。
- VK310+ is a dual 10" three-way tri-amp compact line array speaker applied with selected parts. We choose light-weight neodymium speaker driver for this model. The LF includes 2 symmetrical 10" drivers to ensure its strong punch. The MF and HF follow the coaxial point source design. There is a 2.5" neodymium compress driver in front of the 8" MF driver, which provide ideal sound for the area.
- The enclosure of VK310+ is sprayed by polyurea. The friendly-designed handles provide convenient solutions for transport and set-up.

产品尺寸 Product dimension

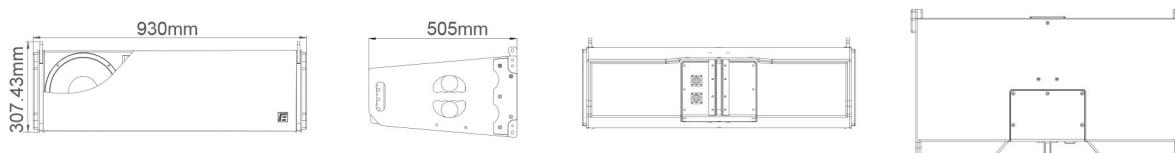

参数规格 Specifications

系统类型	双10寸三分频三驱动曲线阵列音箱	System type	Dual 10" three-way tri-amp line array speaker
灵敏度(1W/1m)	HF:112dB/MF:105dB/LF:103dB	Sensitivity(1W/1m)	HF:112dB/MF:105dB/LF:103dB
频率响应	55Hz~18kHz(±3dB)/45Hz~20kHz(-10 dB)	Frequency response	55Hz~18kHz(±3dB)/45Hz~20kHz(-10 dB)
额定功率(AES)	HF:80W/MF:130W/LF:700W	Power rating(AES)	HF:80W/MF:130W/LF:700W
最大声压级(连续/峰值)	HF: 131dB/137dB ; MF:126dB/132dB ; LF:130dB/136dB	SPL(continue/peak)	HF: 131dB/137dB ; MF:126dB/132dB ; LF:130dB/136dB
覆盖角度(H×V)	90°×10°	Dispersion(H×V)	90°×10°
标称阻抗	HF:16Ω/MF:16Ω/LF:16Ω	Nominal Impedance	HF:16Ω/MF:16Ω/LF:16Ω
低音单元	2×10" (65mm 音圈)钕磁单元	LH	2×10" (65mm voice coil)neodymium
中音单元	1×8" (50mm 音圈)钕磁单元	MF	1×8" (50mmvoice coil)neodymium
高音单元	1×2.5" (1.4" 喉口)钕磁压缩驱动器(65mm 音圈)	HF	1×2.5" (1.4")neodymium compressed driver(65mm voice coil)
连接件	2×8针防水插座 (HF:1+2-/MF:3+4-/LF:5+6-)	Connectors	HF:1+2-/MF:3+4-/LF:5+6-
尺寸(H×W×D)	307.43×930×505mm	Dimension(H×W×D)	307.43×930×505mm
重量	36kg	Weight	36kg



广州市锐丰智能科技有限公司 A:广东省广州市番禺区市莲路石楼路段10号
T:020-3928 0043 F:020-39280123-8014 E:info@rfintell.com Z:511447 www.rfintell.com

Guangzhou Ruifeng Intelligence Technology Co., Ltd Address: No.10, Shilou Section, Shilian Road, Panyu District, Guangzhou, Guangdong, China
T:+86 2039280083 Mobile: +86 13609092324 F:+86-20-39280123-8014 E: mail:sales@rfintell.com Z:511447 www.rfintell.com